SURVIVOR™ ACCUSPLIT®

STOPWATCH

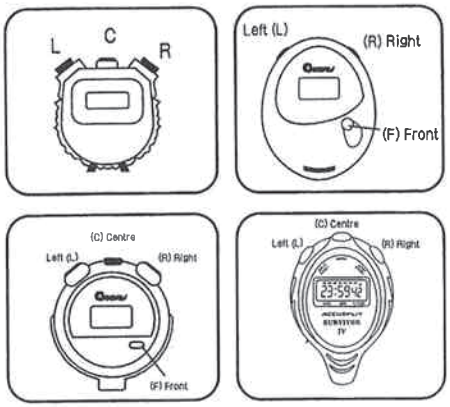

STOPWATCH OPERATIONS

Press C until at Stopwatch display. If necessary, Press R-Stop & L-Reset to 0.

Event	Split	1-2 Finish
R-Start	R-Start	R-Start
R-Stop	L-Split	L-Stop #1
(Repeat R,R	L-Release	R-Stop #2
time-in/	(Repeat L,L	(See #1 time)
time-out)	each Split)	L-Release
L-Reset	R-Stop	(See #2 time)
	L-Reset	L-Reset

TIME, CALENDAR & ALARM DISPLAY

Press C *until you get to the Time Display.*
Hold R - *display Month, Date, & Day*
Hold L - *see Alarm Time*
Hold L & Press R - *Alarm On / Off*

TO SET / DISARM HOURLY CHIME / ALARM

Press C *until you get time display*
Hold C *see Alarm Time &*
Press L . *Chime is ON when dashes appear above display. Chime is OFF when no dashes appear.*

TO SET TIME & CALENDAR

Press C *3 times to enter Set Mode*
Press L *to select Seconds, Minutes, Hour (A/P=12 hour, H=24 hour), Date, Month, Day*
Press R *to change any of the above. (Seconds only resets to 00)*
*(***Hold R** *to change digits rapidly)*
Press C *to return to Time display*

TO SET ALARM

Press C *2 times to enter Set Mode*
Press L *to select Minutes & Hours*
Press R *to change Minutes or Hours*
Press C *to return to Time display*

BATTERY CHANGING

For best results, use Silver Oxide Battery

USER REGISTRATION

Please return this USER (not owner) Registration (or a copy) to the Repair Center address above, so that we may keep you informed of future developments.

Most common use?

_____

Model# _____

e-mail _____

Telephone (optional)

_____

USER _____

_____

_____

_____ Zip _____

ASSEMBLED IN CHINA

© 2000AST

NO-PROOF-OF-PURCHASE LIMITED WARRANTY
See label on back of unit for details, or check
http://support.ACCUSPLIT.com

ACCUSPLIT, Inc. • 6120 Stoneridge Mall Rd., Suite 210 • Pleasanton, CA 94588 USA
800-965-2008 • 925-226-0888 • FAX 925-463-0147 • www.ACCUSPLIT.com • support@ACCUSPLIT.com

Downloaded from www.Manualslib.com manuals search engine